


# TSG OG 1

**TSG OG 1** is a high performance grease / adhesive grease for example for open gears.  
**TSG OG 1** is based on a lithium-/calcium complex with high pressure additives without solid lubricants.  
 Optimum adhesiveness and good corrosion protection are only part of the high performance.  
**TSG OG 1** can be used for a wide range of applications, where high temperature and high load exists.  
**TSG OG 1** is tested and selected for lubrication systems. Best pumping is possible up to 0° C.

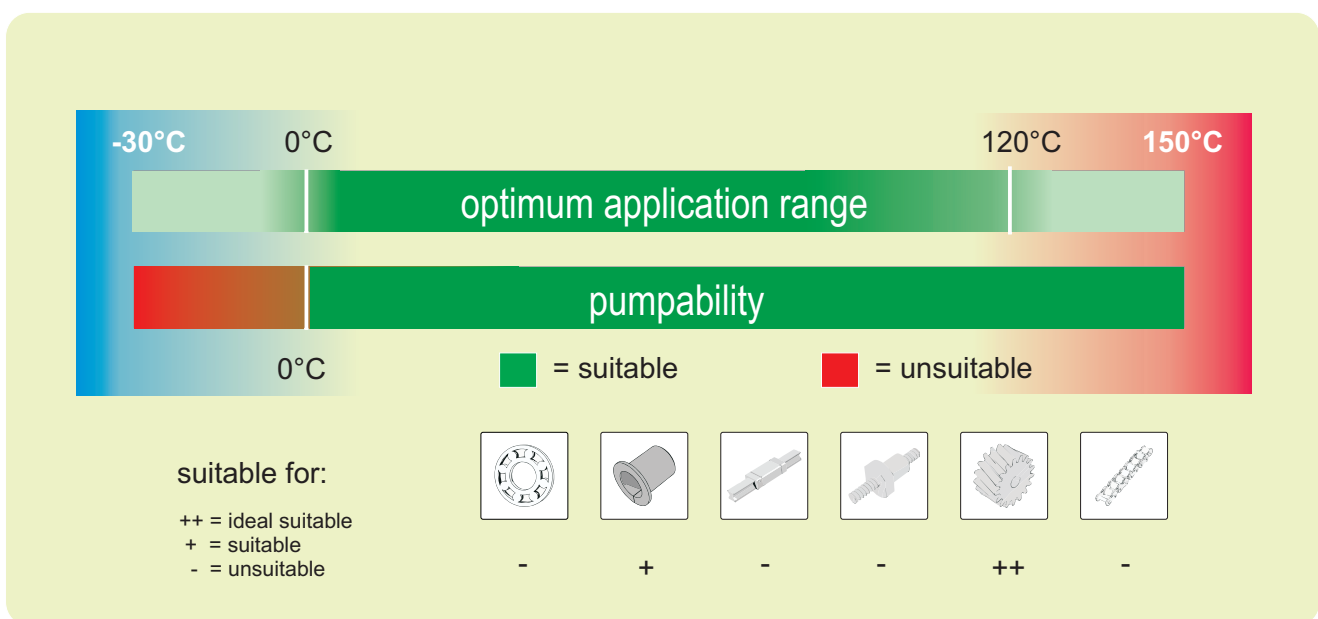

## Technical data:

<b>Chemical composition</b>	mineral oil, Li /Ca – special soap; active substances	
<b>Characterisation</b>	OGP0N -30	DIN 51 825
<b>Appearance</b>	dark brown, solid	
<b>Working temperature</b>	-30°C up to +150°C	
<b>NLGI-class</b>	0-1	DIN 51 818
<b>Base oil viscosity</b>	ca. 800 mms <sup>2</sup> /s	DIN 51 562

As far as we know these information reflect the current state of knowledge and our research. They cannot, however, be taken as an assurance about the properties nor as an guarantee of the suitability of the product for the individual case in point. Before using our products the purchaser must, therefore, check their suitability and be satisfied that the output will be satisfactory. Our products are continually being updated. We reserve the right, therefore, to alter the information of this product of this product information at any time and without prior announcement.